



WSA 209



WSA 210 1161

WSA 209 / 210 1161

Key switch



Natural
ventilation

Application

- for the manual operation of the ventilation / window actuators
- assurance that only authorized persons operate the ventilation / window actuators
- surface or flush mounting
- for schools, institutions and public areas

The key switch can be used in offices, schools or other public areas. With the mounting of the key switch the manual operation of the ventilation / actuators can only be controlled by authorized persons who have a key (e.g. teacher or janitor)

The key switch can be surface or flush mounted. When surface mounted the frame type WSA 209 01 must be used. The frame is to be ordered separately.

Special technical features


- “OPEN/CLOSE” function
- easy installation
- lockable half profile cylinder
- delivered with 3 keys
- 81 x 81 x 35mm (W x H x D)

WSA 209 / 210 1161

Key switch

Item	Item no.
Key switch with 3 keys	WSA 210 1161

Accessories	Item no.
Surface mounted frame for ventilation and key switches 85 x 85 x 47mm (W x H x D)	WSA 209

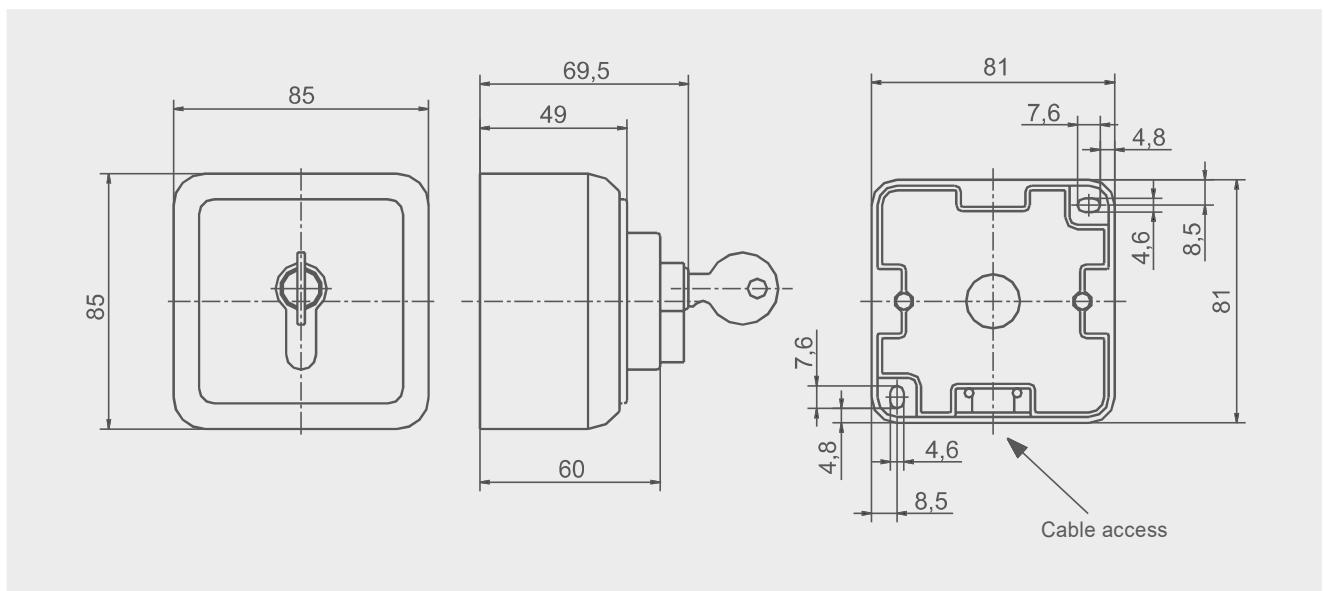

We reserve the right to make technical changes and correct typing errors